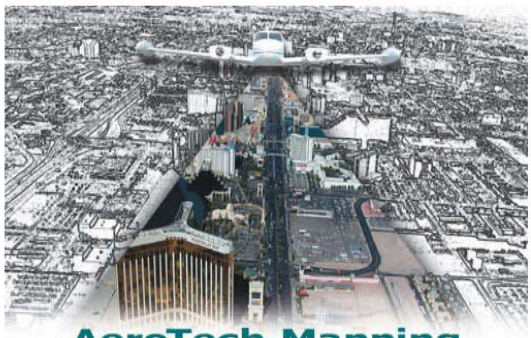


AeroTech Mapping

Arizona - California - Nevada - New Mexico - Texas
Utah - Colorado - North & South Dakota

- **Arizona**
  - 8433 N. Black Canyon Hwy, Suite 120, **Phoenix**, AZ 85021 (623) 242-7656
  - 5055 E. Broadway Blvd, Suite C214, **Tucson**, AZ 85711 (520) 561-6537
- **California**
  - 29970 Technology Drive **Murrieta**, CA 92563 (619) 606-5020
  - 530 S. Hewitt St., Suite 121, **Los Angeles**, CA 90013 (213) 985-4230
- **Nevada**
  - 2580 Montessouri, Suite 104, **Las Vegas**, NV 89117 (702) 228-6277
  - 8600 Technology Way, Suite 115, **Reno**, NV 89521 (775) 853-0900
- **New Mexico**
  - 6565 America Parkway NE, Suite 200 **Albuquerque**, NM 87110 (520) 561-6537

November 6, 2014

Mr. Blake Torgersen, P.L.S., CFedS
PASCO LARET SUITER & ASSOCIATES
535 North Highway 101, Suite A
Solana Beach, California 92075

Re: 2292 Szekeres - 1 Acre - See Attached Exhibit "2292 Szekeres Layout"

Dear Blake,

AeroTech Mapping is pleased to present the following proposal for aerial photography and photogrammetric services consisting of the production of 1:120 or 1:240, one (1') foot topographical information, planimetric detail and optional orthophoto covering the approximate one (1) acre site located in Solana Beach, California. The aerial mapping limits are indicated in green on the attached diagram.

The photography will consist of one (1) flight line and two (2) exposures utilizing a photo scale of 1:2000 (1" = 166.66'). From this photo scale, accuracies of plus or minus 0.197' can be expected as it relates to topographical information generated from the Digital Terrain Modeling (DTM) information. Accuracies of plus or minus 0.131' can be expected as it relates to the DTM information itself.

Deliverables will consist of a hard-copy plot and a CD-ROM containing the Digital Terrain Model information used for the generation of topographical information, the contour information and planimetric detail. Should optional orthophotography be requested, the tfw image limit files, orthophoto TIFF images and .dwg image limits files which will allow for bringing the images into their proper coordinate position will also be supplied.

Final delivery of the digital information will be supplied in AutoCad or as directed by **PASCO LARET SUITER & ASSOCIATES (PLSA)**. Layering scheme will be standard AeroTech Mapping layering.

We understand that **PLSA** will be responsible for the establishment of aerial ground control for the aerial survey. A total of five (5) aerial targets are needed for this project. A layout showing their locations is attached. Target sizes should be in the order of six inches (6") wide and measure approximately four (4') feet in total length.

Project scope for photogrammetric services: 1:120 or 1:240, 1 Foot Topography / Planimetry / Optional Orthophoto

Photography: **B/W**	Overlap: **60%**
Plot: **1 Overall Plot**	Flight scale: **1:2000 / 166.66' PS**
Stereo Model Count: **1**	Mapping Scale: **1" = 10' or 1" = 20'**
Contour Interval: **1 Foot, DTM**	Planimetrics: **Full Detail**
Digital Orthophoto: **B/W, TIFF, 0.15' Pixel (Optional)**	CAD Format: **AutoCad**
Layers: **AeroTech Mapping**	Control: **5 HVP, 6" Wide x 4' Tall**

Project estimated schedule: 10 consecutive working days after date of photography or receipt of control, whichever is later. Please note certain delays may exist, i.e., weather and air flight restrictions.

Teresa Torres	Leo Torres	Lyle Slater	Mike Dauer	Eric Phan, P.L.S.	Tim Burrows
President, Principal	VP, Principal	GM, AZ & CA	Account Executive	General Manager	Account Executive
Teresatorres@atmlv.com	Leotorres@atmlv.com	Lslater@atmlv.com	Mikedauer@atmlv.com	Ericphan@atmlv.com	Timburrows@atmlv.com
702-228-6277 (office)	702-595-6277 (cell)	602-459-3933 (cell)	619-606-5020 (cell)	702-325-8808 (cell)	520-561-6537 (cell)

Project accuracy to conform to generally accepted photogrammetric standards established by the American Society of Photogrammetry & Remote Sensing (ASPRS).

Payment Schedule (Mapping):	**Fee:**	**$**	**1,750.00**	_____**Initial**
Payment Schedule (Optional Orthophoto):	**Fee:**	**$**	**85.00**	_____**Initial**
Payment Schedule (All Deliverables):	**Fee:**	**$**	**1,835.00**	

Terms Net 30 days

This proposal will remain effective for 60 days after the date of this letter. If you have any questions, please do not hesitate to contact us at any time. AeroTech Mapping appreciates the opportunity of submitting this proposal and look forward to working with **PASCO LARET SUITER &** ASSOCIATES.

Your signature in the space provided below will indicate your acceptance of our proposal and serve as our Notice to Proceed.

Sincerely,

Lyle E. Slater
General Manager

Accepted by:
PASCO LARET SUITER
& ASSOCIATES

_____
Blake Torgersen, P.L.S., CFedS

_____
Date